


MA616 Broadcasting & Recording Stand

GENERAL INTRODUCTION


MA616 is a delicate desktop bracket stand, its flexible function makes product space saving. The stand makes of alum and engine plastic which is more stable and durable. The stand comes with XLR cable and USB cable when connecting, turn on stand top LED red, blue purple 3 color light for you to choose. Mic angle adjust lock screw and top stand angle adjust lock screw make the whole stand flexible and stable. It features two different bases, inserting the stand base into desk directly or via clamp to lock the stand on the desk. It applies in broadcasting, TV show, studio, personal recording such occasions, easy to installation and use. MA616 has 3 sizes, you can choose the one you prefer.

INSTALLATION INSTRUCTIONS


Installation 1

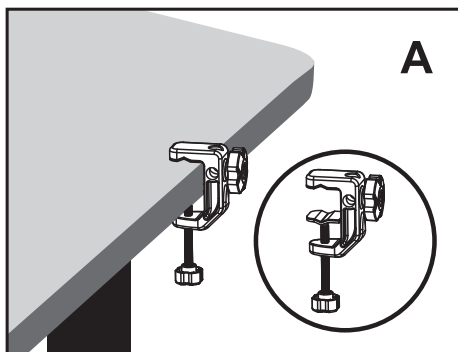


First, fixing the clamp on the desk.

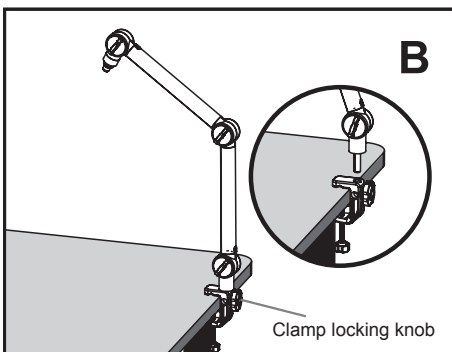


Second, inserting the stand into clamp and lock it by clamp locking knob.

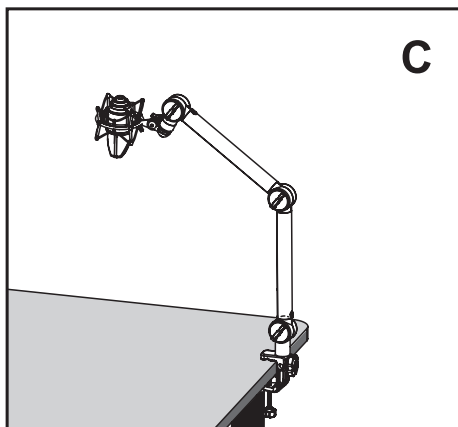

Finally, switching the shock mount and microphone.

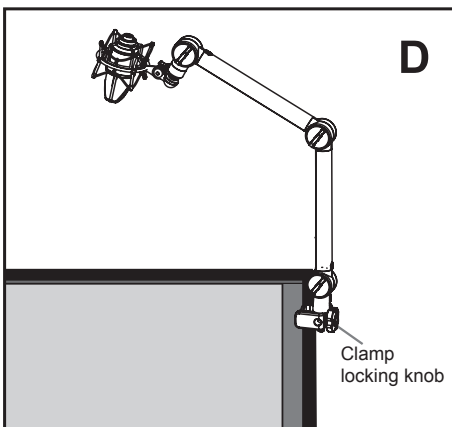


It also can clamp the clip on a vertical board, use clamp locking knob to lock it on another side's locking hole.

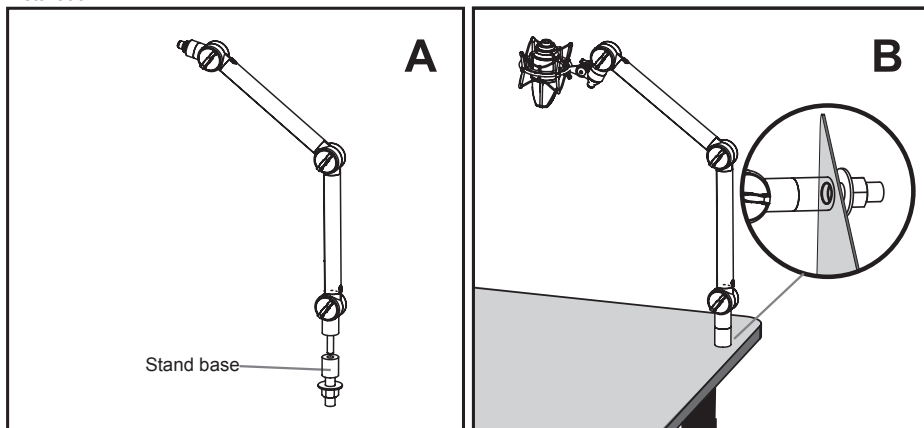

Insert the stand into stand base.

Insert the stand into desk, then clockwise switch the base to lock it. (desk should have a hole that the diameter is about 20-26mm, suitable for desk thick from 15-50mm).


PRODUCT APPLICATION

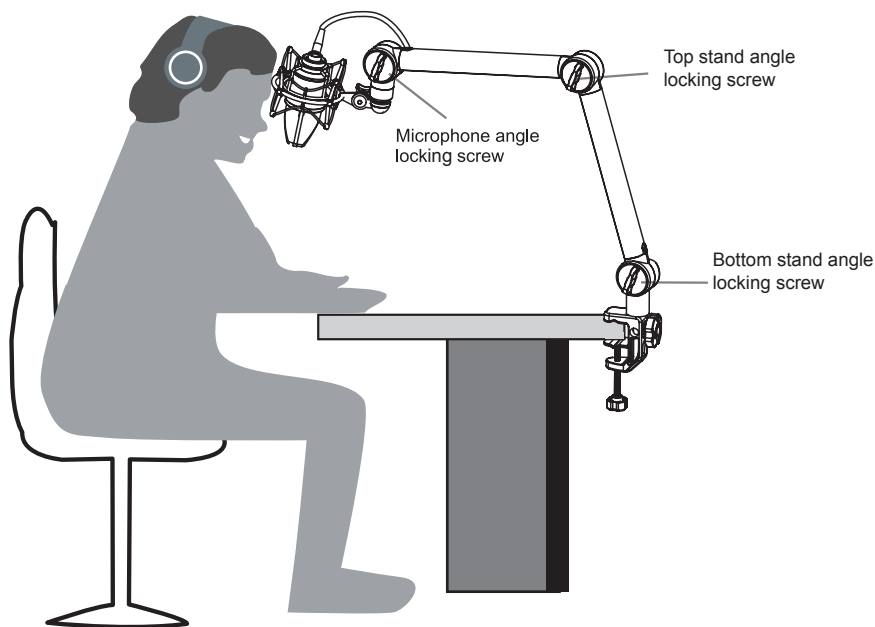

- 1、 Loosen this microphone angle locking screw you can adjust the angle of microphone. The adjustable angle is about from 55°-265°.
- 2、 Loosen this top stand angle locking screw you can adjust the angle of top stand. The adjustable angle is about from 30°-180°.
- 3、 Loosen this bottom stand angle locking screw you can adjust the angle of bottom stand. The adjustable angle is about from 30°-180°.
- 4、 After finish above steps, you can begin to recording. If you still unsatisfied with the position, you can according to the above steps readjust the position, until you get your satisfied position.


NOTE: another installation is the same application.

POWER SWITCH

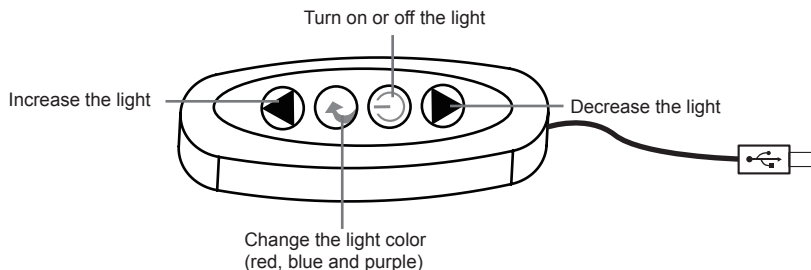

USB POWER

All devices with USB connector can offer power to MA616 LED indicator. It powered by PC USB connector, phone charger, bank charger and other USB devices.

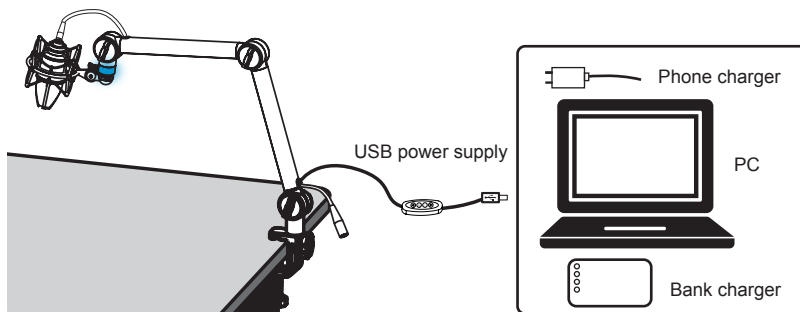

When connecting to USB devices, turn on stand top LED red, blue purple 3 color light for you to choose.

SPECIFICATION

XS size stand

Top stand length: 26cm
Bottom stand length: 26cm
Max bearing weight: 2.5kg
Clamp clipping thickness: 1-50mm
Mic angle adjustable range: 55°-265°
Top stand angle adjustable range: 30°-180°
Bottom stand angle adjustable range: 30°-180°

M size stand

Top stand length: 36.5cm
Bottom stand length: 36.5cm
Max bearing weight: 2.3kg
Clamp clipping thickness: 1-50mm
Mic angle adjustable range: 55°-265°
Top stand angle adjustable range: 30°-180°
Bottom stand angle adjustable range: 30°-180°

XL size stand

Top stand length: 52cm
Bottom stand length: 52cm
Max bearing weight: 2kg
Clamp clipping thickness: 1-50mm
Mic angle adjustable range: 55°-265°
Top stand angle adjustable range: 30°-180°
Bottom stand angle adjustable range: 30°-180°

Copyright © Ningbo Alctron Electronics Technology CO.,LTD. All rights reserved. Specifications and appearance subject to change without notice.

Ningbo Alctron Electronics Technology CO.,LTD.
No.76 SanCheng Road, XiuFeng Industrial Area, GaoQiao Town, NingBo, China.
Tel: +0086 574 87150672
Fax: +86 574 87157176
E-mail: info@alctron-audio.com
www.alctron-audio.com


MA616 播音&录音支架

产品介绍


MA616是一款设计精巧的桌面悬臂支架，可折叠收起，节约空间便于携带。支架采用优质的铝合金和工程塑料设计加工而成，坚固耐用。支架配有卡侬音频线和USB线，当USB线和设备连接的时候，打开开关，支架顶部的3种颜色（红、蓝、紫）LED指示灯供您选择。话筒角度调节旋钮和上支臂角度调节旋钮能够使支架调节到理想的角度。支架配有两个不同的底座，可以将支架直接旋入桌子也可通过桌面锁紧夹块将支架固定在桌子边缘。支架适合应用在广播电台、电视台、录影棚、个人录音等场合，安装方便快捷，使用简单，安全可靠。MA616支架有三个不同的尺寸（小，中，大），您可以根据自己的喜好购买。

安装说明


安装说明1

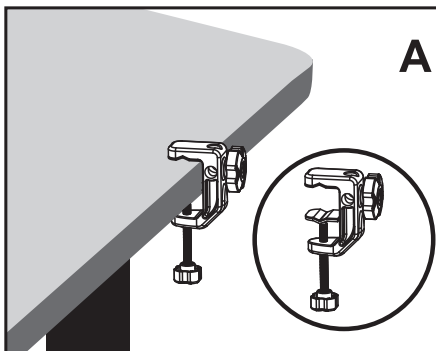


首先将夹块固定在桌子上。

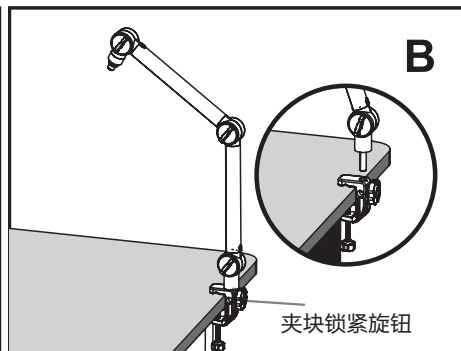


其次将支架插入夹块随后用夹块锁紧旋钮锁紧。

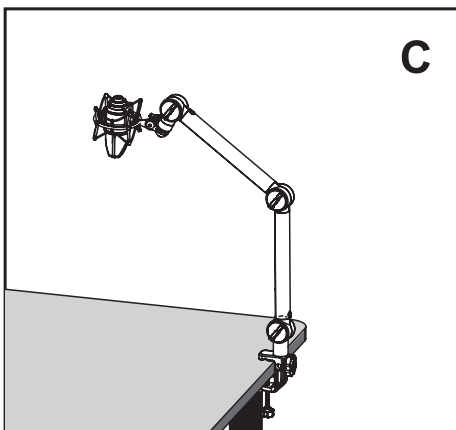

最后旋入防震架和麦克风。

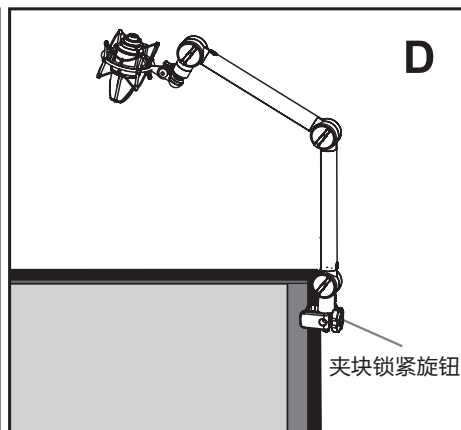


也可以将夹块夹在垂直的板上，用夹块锁紧旋钮在另一边的将其锁紧。

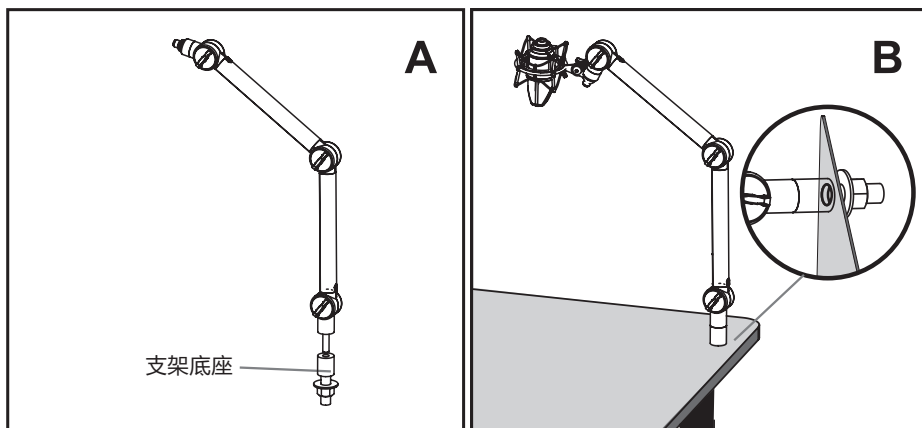

将支架插入支架底座。

将支架插入桌子，用底座顺时针旋转锁紧。(桌面应有20-26mm的孔位，此安装方式可夹桌面厚度为15-50mm)。


产品应用

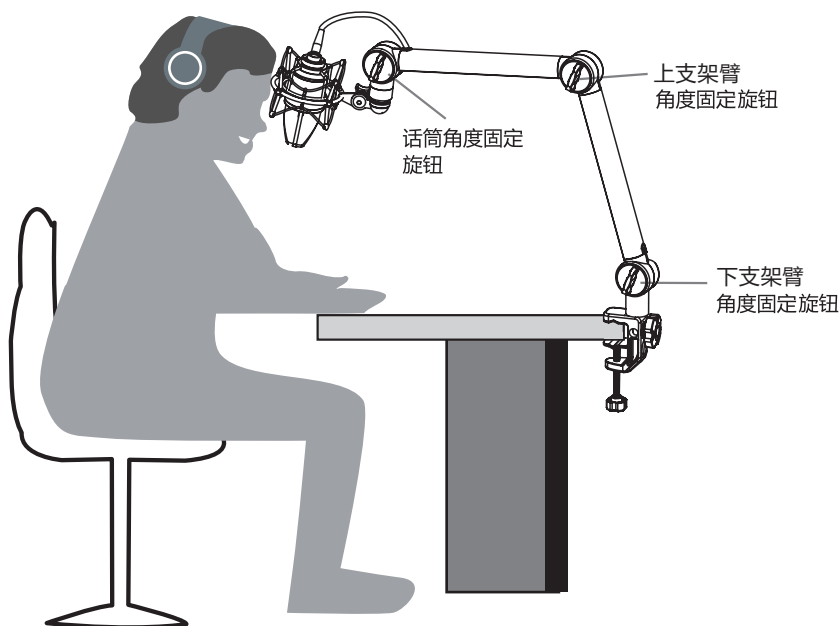

- 1、拧松话筒角度固定旋钮可以自由的调整麦克风的角。可调角度大约为 55° - 265° 。
- 2、拧松上支架臂角度固定旋钮可以自由的调整上支架臂的角度。可调角度大约为 30° - 180° 。
- 3、拧松下支架臂角度固定旋钮可以自由的调整下支架臂的角度。可调角度大约为 30° - 180° 。
- 4、完成上述步骤后，您就可以开始录音了，如果您对这个位置不满意，您可以按照上述步骤再调整一下直到调整到您想要的效果为止。


注意：安装方式2的产品应用方式相同。

开关

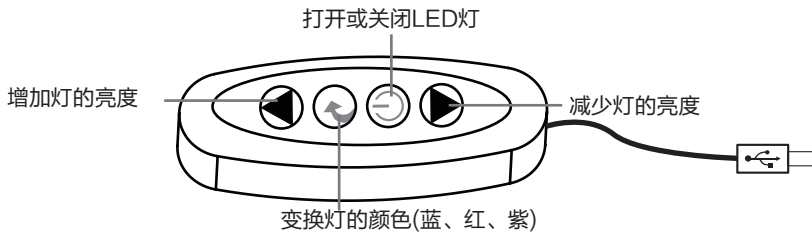

USB供电

所有带USB接口的设备都能给MA616的LED指示灯供电，可以采用电脑USB接口直接供电，手机充电器，充电宝以及其他USB设备供电。

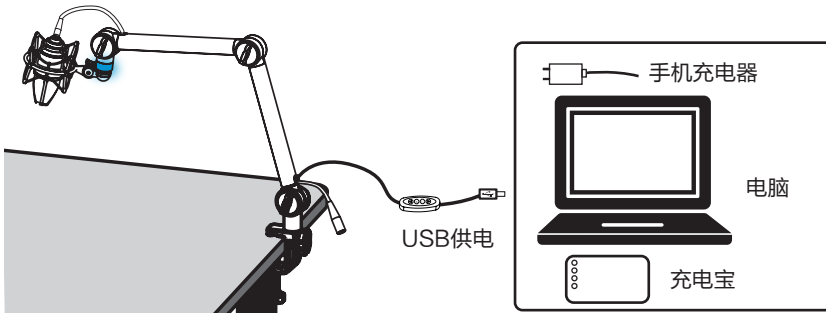

当连接USB设备的时候，打开开关，支架顶部的3种颜色（红、蓝、紫）LED指示灯供您选择。

产品参数

XS码 尺寸支架

上支臂长：26cm
下支臂长：26cm
最大承重：2.5kg
夹块可夹厚度：1-50mm
话筒可调角度：55° -265°
上支架臂可调角度：30° -180°
下支架臂可调角度：30° -180°

M码 尺寸支架

上支臂长：36.5cm
下支臂长：36.5cm
最大承重：2.3kg
夹块可夹厚度：1-50mm
话筒可调角度：55° -265°
上支架臂可调角度：30° -180°
下支架臂可调角度：30° -180°

XL码 尺寸支架

上支臂长：52cm
下支臂长：52cm
最大承重：2kg
夹块可夹厚度：1-50mm
话筒可调角度：55° -265°
上支架臂可调角度：30° -180°
下支架臂可调角度：30° -180°

版权所有©宁波奥创电子科技有限公司,所有权保留。必要的技术数据和外观更改恕不另行通知。

宁波奥创电子科技有限公司

地址：浙江省宁波市海曙区秀丰工业区三成路76号

电话：0574-88011699

传真：0574-87157176

邮箱：sales@alctron-audio.com

网址：http://www.alctron-audio.com 全国统一服务热线：4000-160-112