

TABLE CONFERENCE MICROPHONE



MG-2

MG-2 table conference microphone can be widely used for such situations as large conferences、 public speeches , outdoor lectures and so on.

It adopts back electric condenser capsule,with characteristics of bright & clear sound,high sensitivity and low noise.

Besides, there is a red aureola at the top of the microphone.

The microphone need phantom power supply to work and its gooseneck is flexible,can be used for every situation.

MG-2 has a zinc base and use the standard XLR balanced output connector.

Specifications:

Element: Back Electret Condenser

Polar Pattern: Uni-directional



Frequency Response: 50-16KHz

Sensitivity: $-39\text{dB} \pm 3\text{dB}$ ($0\text{dB}=1\text{V/Pa}$ at 1kHz)

Output Impedance: $250\ \Omega \pm 30\%$ (at 1kHz)

Power Supply: 48V Phantom Power

Frequency Response Graph:

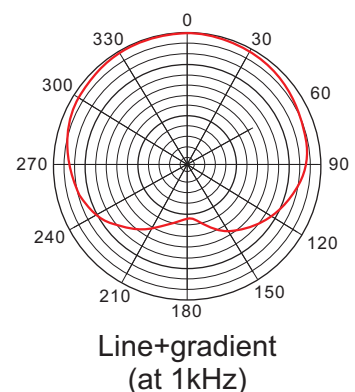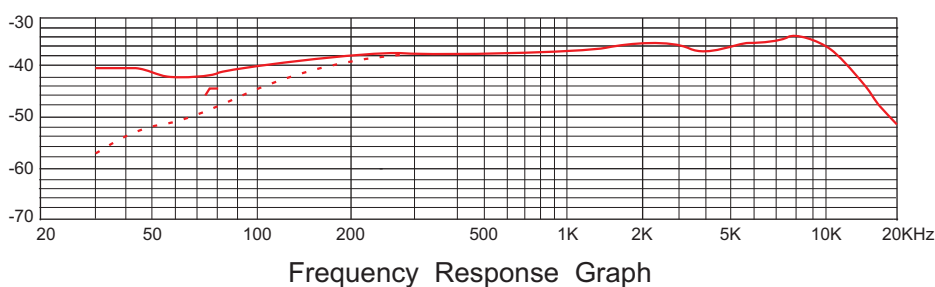

* The related specification or deployment are subject to change without any prior notification.