



Product Manual

PAJ-15BM






Features

- Bi-amped 2-way Configuration
- USD/SD MP3 Input
- Bluetooth Connectivity
- Mic / Line Inputs
- Treble and Bass EQ Controls
- Link Output

Specifications

- Total: 250 Watts RMS / 500 Watts Peak
- Tweeter: 50 Watts RMS / 100 Watts Peak
- Woofer: 200 Watts RMS / 400 Watts Peak
- 15" Woofer with 60oz Magnet and 75mm Voice Coil
- 44mm Titanium Diaphragm Driver
- Frequency Response: (+/-3dB) 48Hz - 20KHz
- Sensitivity: 98dB (1W/1m)
- Impedance: 8ohm
- Dimensions (WxHxD): 460x 690 x 380 mm
- Weight:

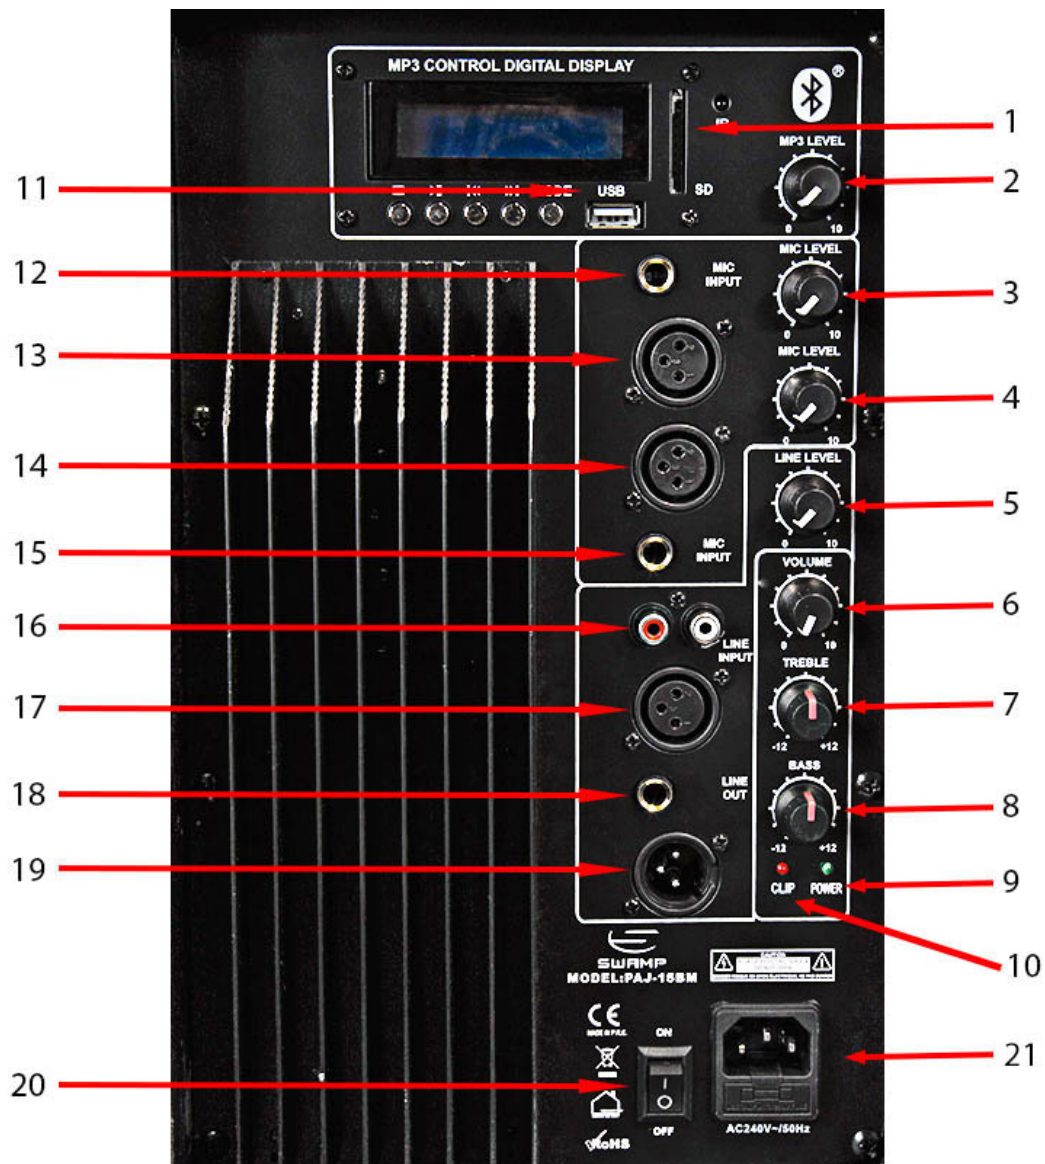

1. SD Card input - MP3 format
2. MP3 / Bluetooth level - Gain control
3. MIC-1 input level - Gain control
4. MIC-2 input level - Gain control
5. LINE input level - Gain control
6. Main volume control - Speaker output level
7. Treble EQ Control (-12db to +12db)
8. Bass EQ Control (-12db to +12db)
9. LED indicator - Power on
10. LED indicator - Input level too high, distortion
11. USB Memory input - MP3 format
12. MIC-1 input - 1/4" TRS Balanced
13. MIC-1 input - XLR balanced
14. MIC-2 input - XLR balanced
15. MIC-2 input - 1/4" TRS Balanced
16. RCA Line input - Left & Right
17. XLR Line input - Balanced
18. Line output - 1/4" balanced, link out
19. Line output - XLR balanced, link out
20. Power switch - On/Off
21. 240V power input - IEC

IMPORTANT SAFETY INSTRUCTIONS



- To reduce risk of electric shock, never open the unit. There are no user serviceable parts, refer service to an authorised SWAMP service center.
- Do not expose this unit to any kind of moisture.
- Unit should be used away from heat sources.
- Do not obstruct vents or exhaust fan.
- Please ensure that the unit is situated in a ventilated area.
- Make sure the unit is placed on a level and stable surface. This unit should not be mounted to a wall or ceiling.
- This product should only be operated with a IEC power cable featuring an Australian Electrical Safety Authority Approved 3pin plug.
- Ensure the power cable is not damaged before use.
- Disconnect from mains power before to make connections in the amplifier.
- Do not carry the unit via the top mounted handle if present on your model.



This symbol on the product or on its packaging indicates that this product shall not be treated as household waste. Instead it shall be handed over to the applicable collection point for the recycling of electrical equipment. By ensuring this product is disposed of correctly, you will help prevent potential negative consequences for the environment and human health, which could otherwise be caused by inappropriate waste handling of this product. The recycling of materials will help to conserve natural resources. For more detailed information about recycling of this product, please contact your local city office, your household waste disposal service or the shop where you purchased the product.